


PRIMARY SCRAPPER

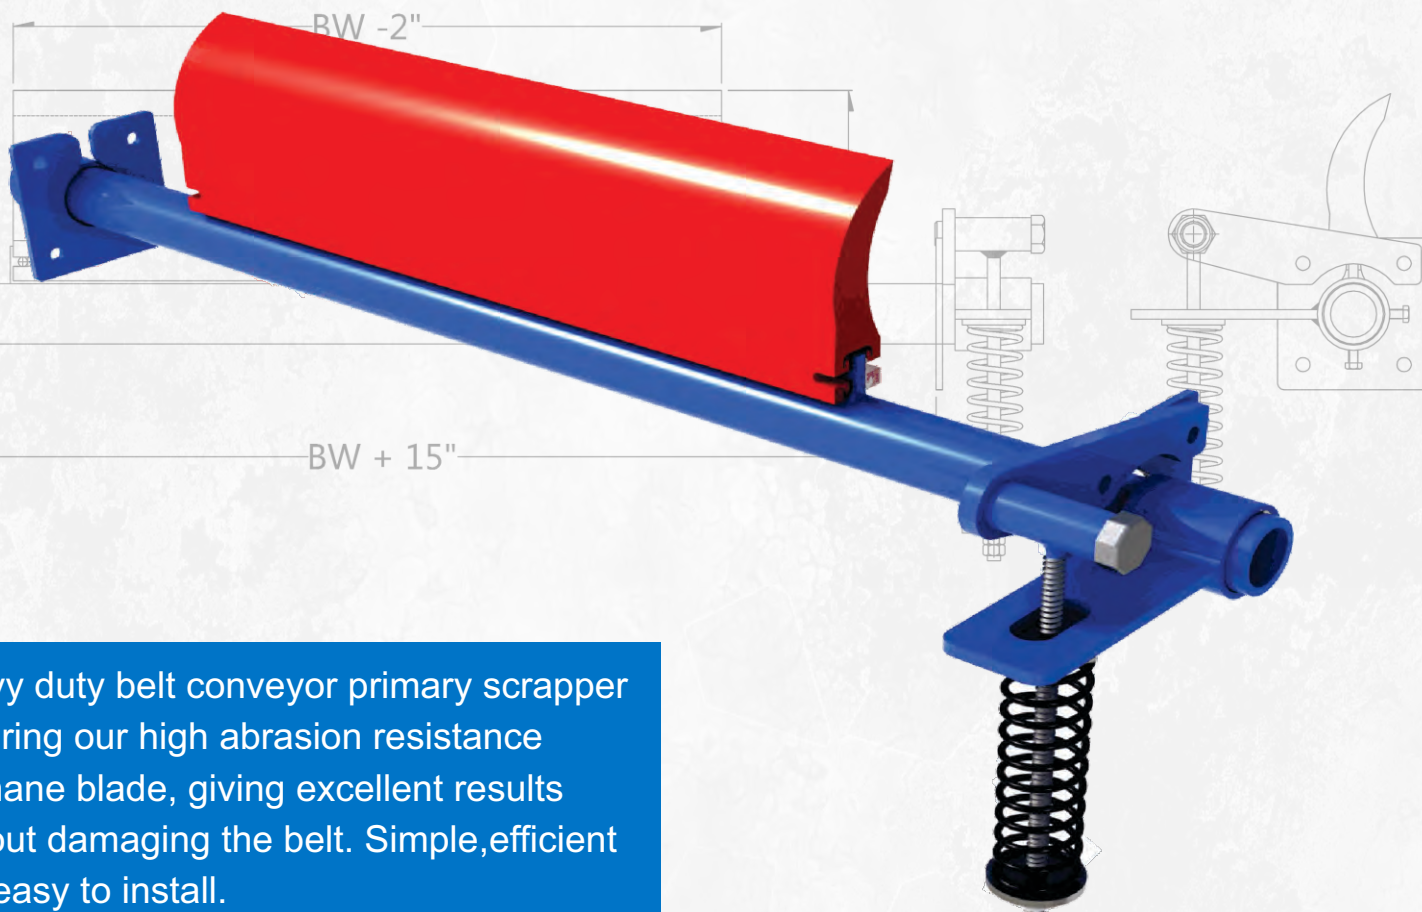

Heavy duty belt conveyor primary scrapper featuring our high abrasion resistance urethane blade, giving excellent results without damaging the belt. Simple, efficient and easy to install.




Available with our heavy duty tensioning system for a precise and easy adjustment of the pressure to apply to the scrapper.

Double tensioning systems for belt of 48 inches wide and over. All the tensioning system are powder coated for an extra long life of the system.


Available for belt width from 18 to 84 inches. Customised blades are also available

The blades are easy to replace and will fit on competitor systems

Simply the best quality/price ratio on the market.

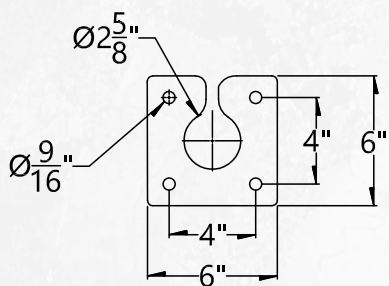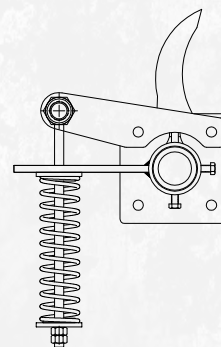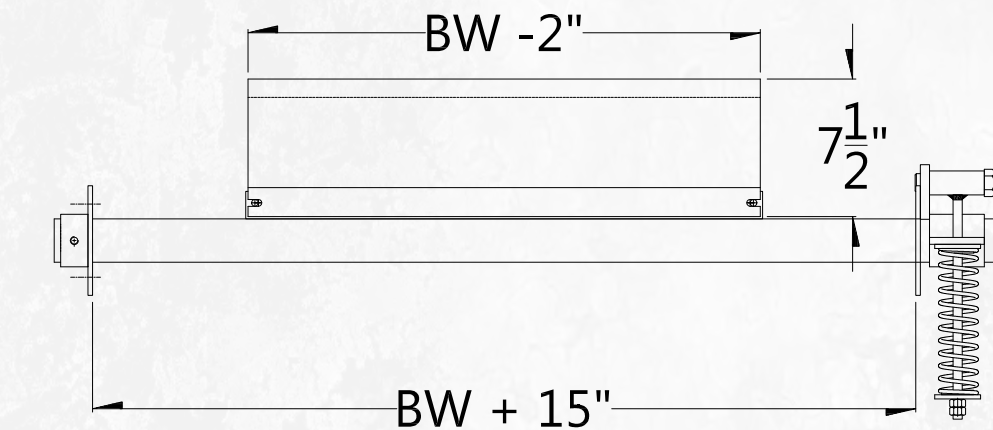

SUPPORTS BOLTING PATTERN

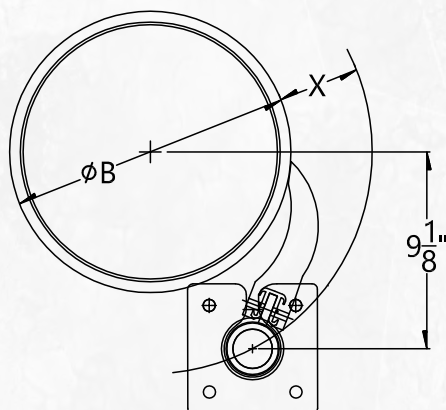

BELT CLEANER XL	
□ PULLEY in. †	DIMENSION X in.
10 min	4 3/4
12	4 1/2
14	3 3/4
16	3 1/2
18	3
24 & UP	2.75
INCLUDES BELT AND LAGGING.	

TO ORDER:

PXL- xx - T

Where:

xx : belt width (inches)

T : optionnal tensionner

STANDARD INSTALLATION

