
MINE DUTY PRIMARY SCRAPPER

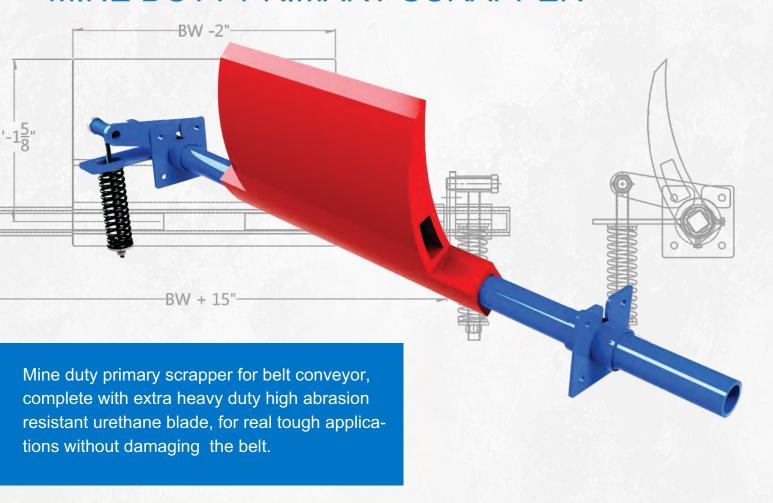

Available with our extra heavy duty tensionning system, allowing very precise adjustment of the blade pressure on the belt.

Urethane blade, mounted on a steel tubing, gives an extra rigidity to the assembly for extreme operation conditions. Blades are easily replaceables by removing inserts on each side of the blade tubing.


Double tensionners for blade 48 inches and over

Powder coated finish of all the tensionner parts.

Available for belt width from 18 to 84 inches wide.

For severe corrosion conditions, complete urethane covering of steel parts in contact with the material is avalaible as an option. (as shown on the above picture)



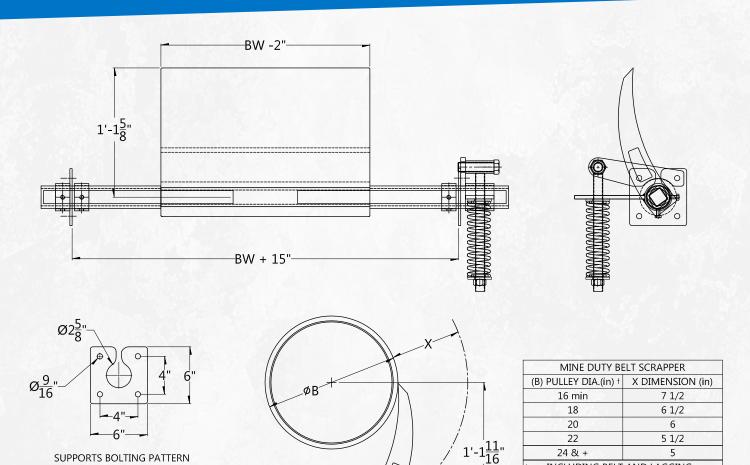

TO ORDER:

SUPPORTS BOLTING PATTERN

PXL-MD-xx Where xx is the belt width

TYPICAL PRODUCT

24 & +

INCLUDING BELT AND LAGGING

5

