


CURVED SECONDARY SCRAPER

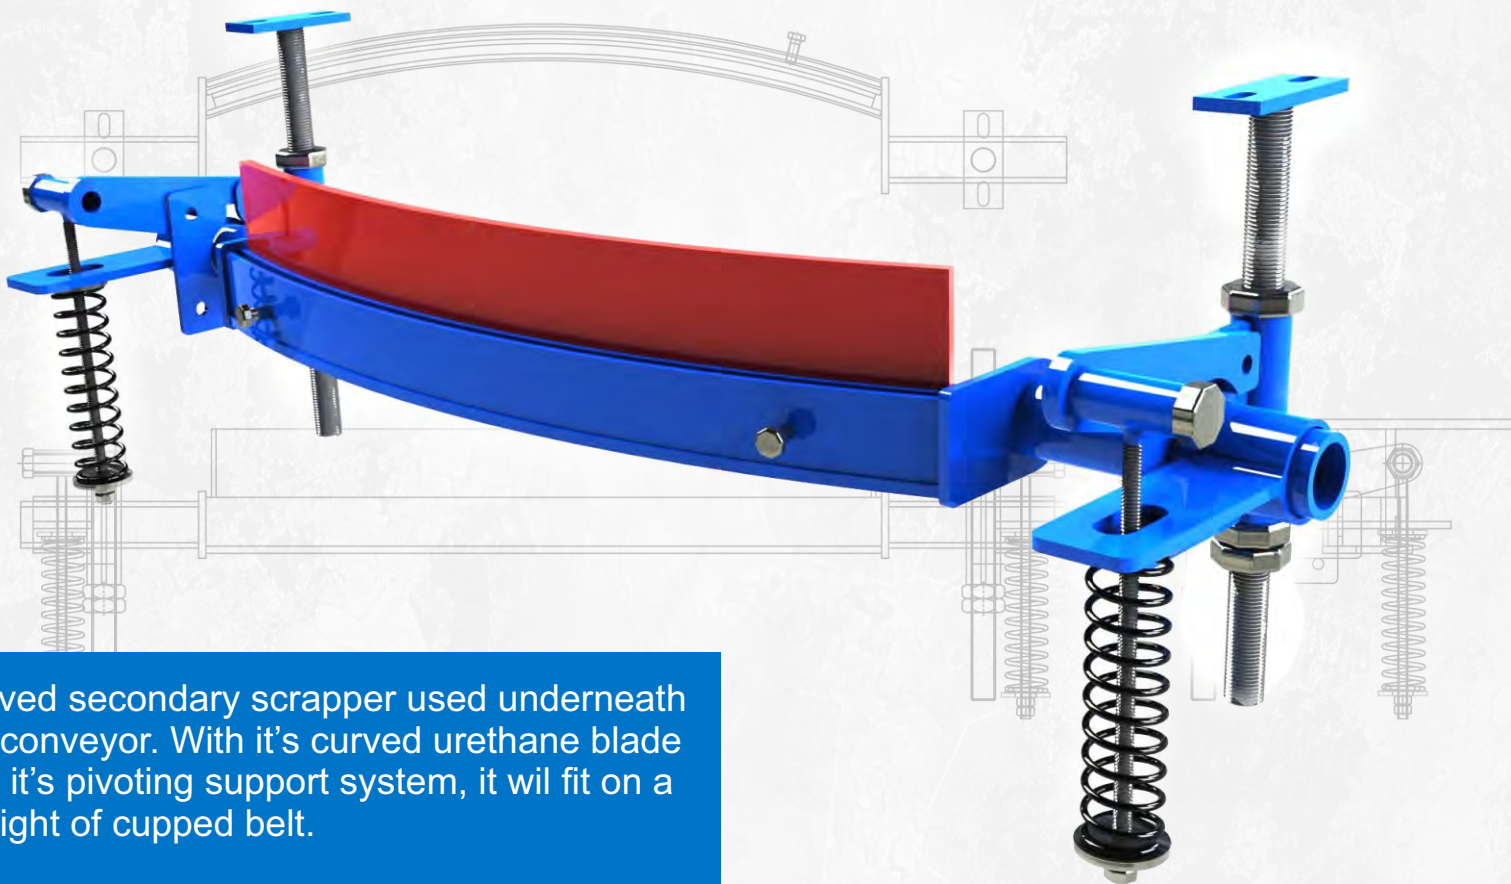

Curved secondary scraper used underneath the conveyor. With its curved urethane blade and its pivoting support system, it will fit on a straight or cupped belt.

Secondary scraper to clean fines left by a primary scraper on straight or cupped belts. Usually installed underneath the conveyor outside the discharge chute.


Supplied with a sturdy pivoting support with springs for a very precise positioning of the curved blade with the curved belt. All the tensioner parts are powder coated for an extended life of the system.

Shall be installed perpendicularly to the belt.

The blade is easily replaceable by using bolted clamp.

Available for belt width from 18 to 72 inches.

DIMENSIONS AND INSTALLATION:

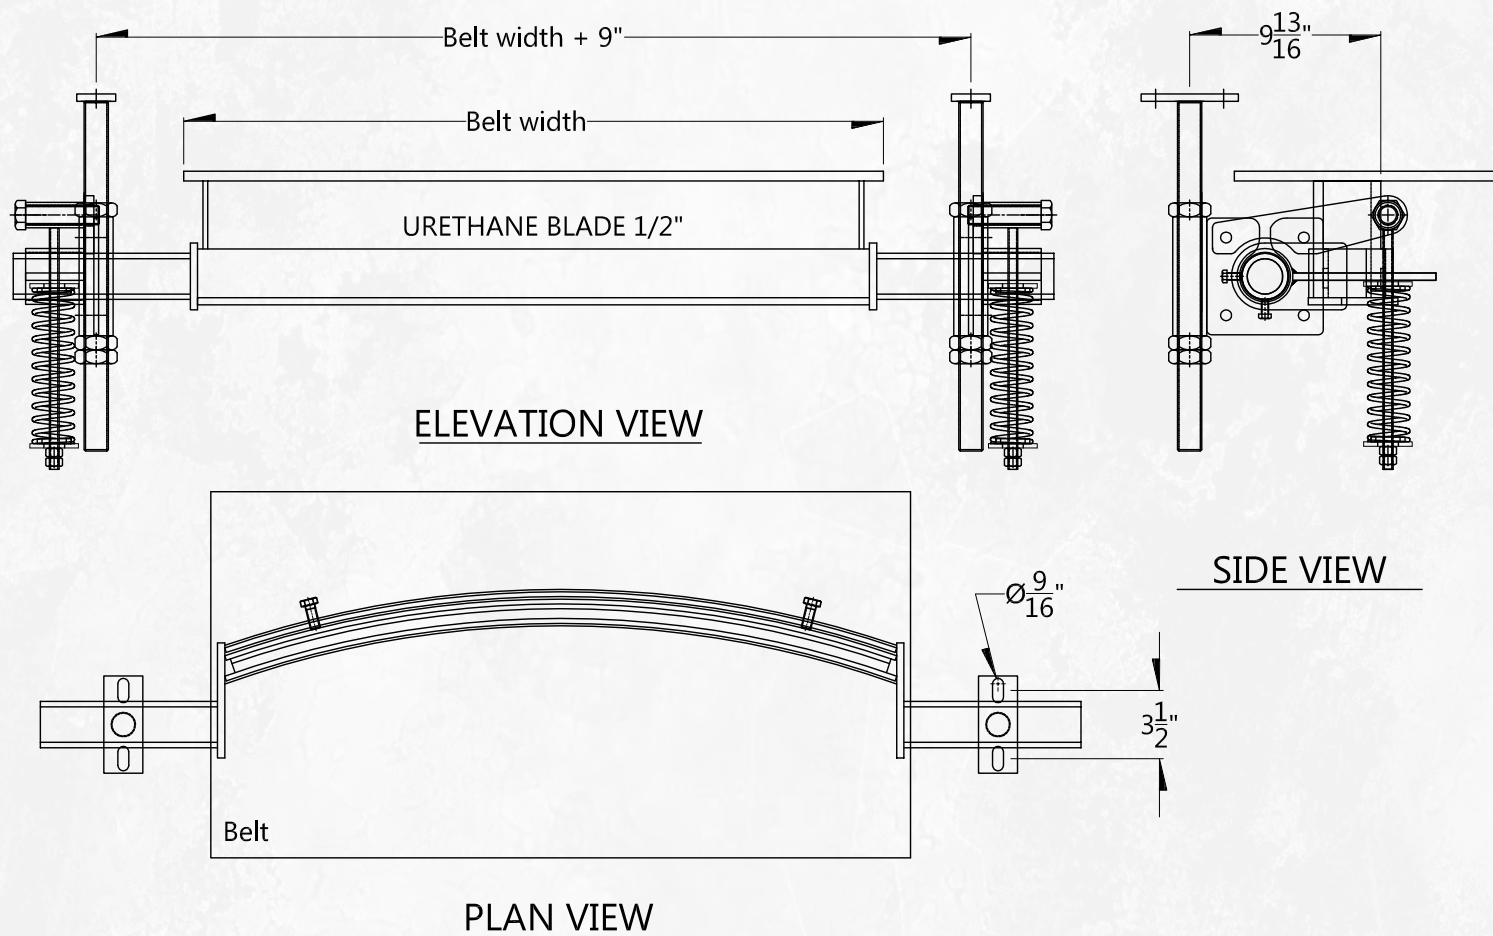

TO ORDER:

PSC- xx - S

Where:

xx : Belt width (inches)

S : Optionnal support

TYPICAL INSTALLATION

