
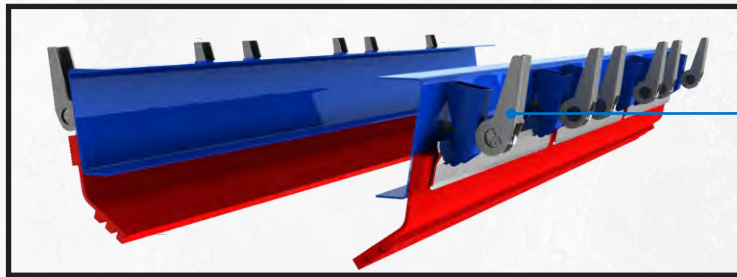
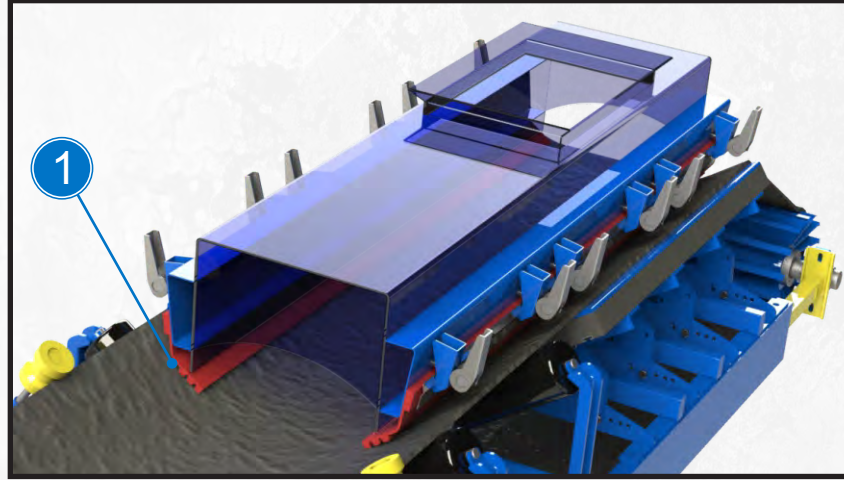



PLASTHANE HIGH EFFICIENCY SKIRTING SYSTEM SK3

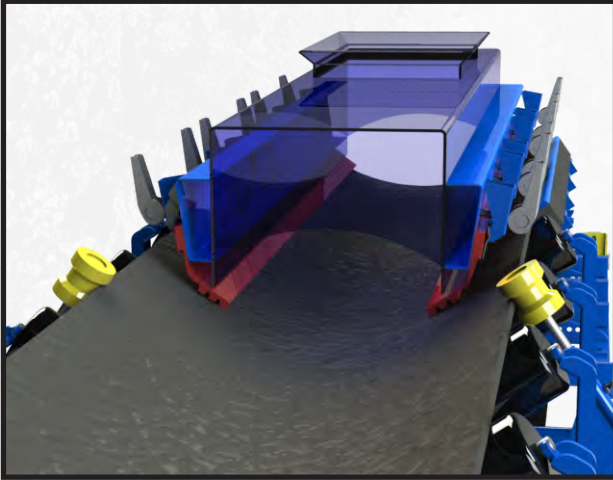


New concept of urethane skirting system for a perfect seal between hopper and belt. It can be used for fines or heavy material.

- 1** New concept of urethane skirting system offering a perfect seal at loading points. It can be used with or without impact bed underneath the belt. Our special urethane formula skirting will follow the belt deflexion and won't damage the belt, even in the worst conditions. It will also accept high temperature material up to 150 deg C.
- 2** Our Cam-Lock skirting tightening system, using a cam principle, is very simple and can be adjusted very easily just by turning the handles. Handle can be set horizontally for low space hopper. It can be installed on a new or existing conveyor by welding support plates to the wall of the receiving hopper. Skirting comes in a maximum of 25' rolls.

DIMENSIONS

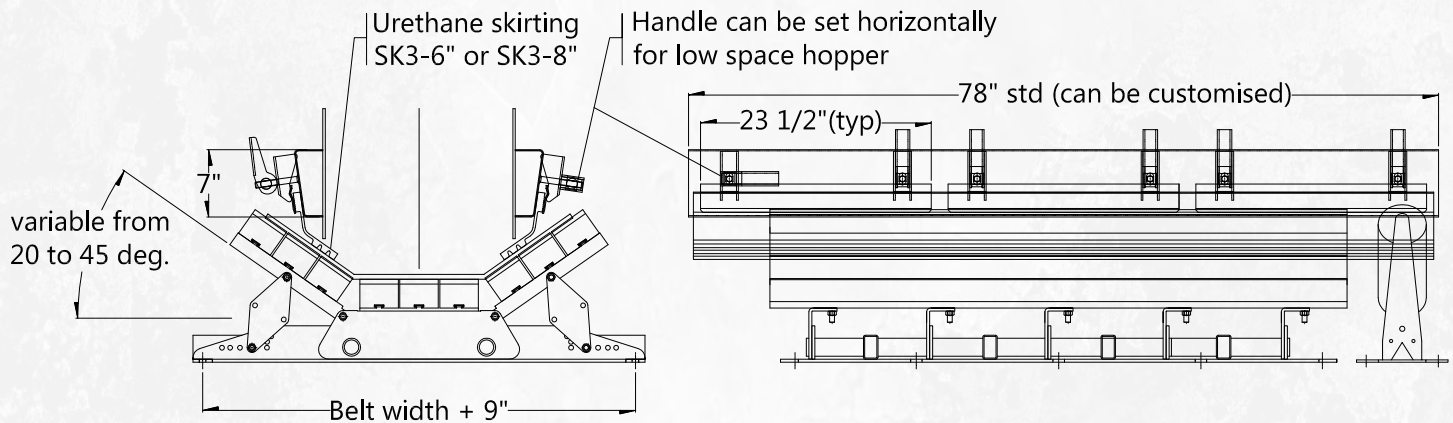

STANDARD PRODUCTS

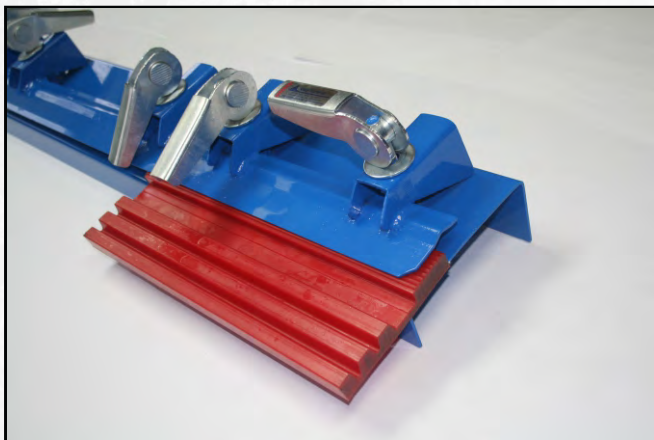

INFORMATION REQUIRED TO ORDER:

- Skirting only: SK3-6 or SK3-8 and required length
- Cam-Lock Clamping system: Length of support plates you need and number of handles