PLASTHANE "V-PLOW"



This scrapper is used to clean particules sticked on the top of the return belt. Usually installed in front of the tail conveyor pulley and ideally behind the conveyor loading point.

Sold with our sturdy support system giving pressure by gravity. It's pivots system will keep the v-plow in it's perfect position for high efficiency and smooth running. All the tensionner parts are powder coated for an extended life of the system.


Shall be installed perpendularly to the belt


The urethane is easy to change by the use of bolted clamps.

Available for different belt widths from 18 to 84 inches



DIMENSIONS ET INSTALLATION:

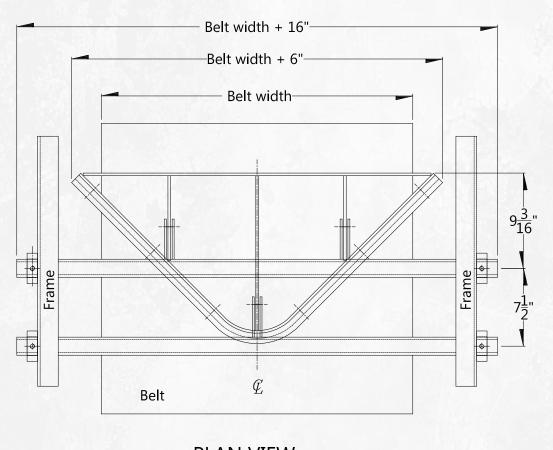

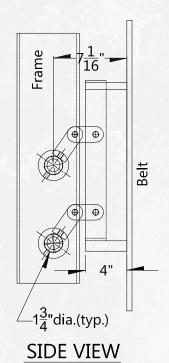

PLAN VIEW

TO ORDER:

PVP-xx

Where:

xx: Belt width (inches)





